



217#3

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

APPLN. OF: SUBRAMANIAN et al.

SERIAL NO.: 09/903,100

FILED: July 11, 2001

FOR: System and Method for Recovering Applications

GROUP:

EXAMINER:

DOCKET: GSH 08-885923

Assistant Commissioner of Patents and Trademarks
Washington, D.C. 20231

RECEIVED
OCT 23 2001
Technology Center 2100

SUBMISSION OF PRIORITY DOCUMENT

Dear Sir:

Submitted herewith is the certified copy of Canadian Patent Application No. 2,347,404 in support of Applicant's priority claim under 35 USC 119.

Respectfully submitted,

Norman P. Soloway
Attorney for Applicant
Registration No. 24,315

CERTIFICATE OF MAILING

I hereby certify that this correspondence is being deposited with the United States Postal Service as First Class Mail in an envelope addressed to: Commissioner of Patents and Trademarks, Washington, D.C. 20231 on October 10, 2001 at Tucson, Arizona.

By: Kim Hood

HAYES, SOLOWAY,
HENNESSEY, GROSSMAN
& HAGE, P.C.
P.O. BOX 3042
130 W. CUSHING ST.
TUCSON, AZ 85702-3042

TEL. 520.882.7623
FAX. 520.882.7643



Office de la propriété
intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An Agency of
Industry Canada



*Bureau canadien
des brevets*
Certification

*Canadian Patent
Office*
Certification

La présente atteste que les documents
ci-joints, dont la liste figure ci-dessous,
sont des copies authentiques des docu-
ments déposés au Bureau des brevets.

This is to certify that the documents
attached hereto and identified below are
true copies of the documents on file in
the Patent Office.

Specification and Drawings as originally filed with Application for Patent Serial No:
2,347,404, on May 10, 2001, by **COREL CORPORATION**, assignee of Ramesh
Subramanian, James Birchall and Andrew Van Beek, for "System and Method for
Recovering Application".


Agent certificateur/Certifying Officer,

July 30, 2001

Date

Canada

(CIPO 68)
01-12-00

OPIC  CIPO

ABSTRACT

An operating system has a top level exception handler which terminates an application as a default action upon receipt of any exceptions. An application recovery system traps an exception which is dispatched to the top level exception handler before it reaches the top level exception handler. In the event, an exception cannot be resolved, the application recovery system terminates a thread that caused the exception, and continues execution of the application.

- 1 -

System and Method for Recovering Applications

[0001] This invention relates to a system and method for recovering applications and more particularly, to a system and method for recovering applications from
5 run time problems.

BACKGROUND OF THE INVENTION

[0002] There are a number of barriers to successful execution of an application
10 on a computer. The computer is operated by an operating system having an executor. The executor executes code or instructions of the application. There are some situations when the executor cannot execute the code contained in the application. Examples of such situations include dividing by zeros and writing to memory that either does not exist or is invalid.

15 **[0003]** These situations are detected by the hardware of the computer and passed to the operating system as "interrupts". This means that the operating system is to "interrupt" the thread that is currently executing a piece of code of the application, and cause the interrupt. Some of interrupts are expected by the
20 computer, and are used to signal the operating system that something has happened in the hardware. Such expected interrupts are handled by the operating system. Other times, interrupts mean that the hardware is communicating to the operating system that an instruction of the application cannot be completed because of some "exceptional" conditions. These
25 "exceptional" interrupts are known as "exceptions".

[0004] Conventionally, applications do not have any mechanism that let themselves handle these exceptions programmatically. Thus, the operating system gets these exceptions first and, if the operating system is not able to
30 handle the exception, it terminates the application as a default action of the operating system. Thus, the user does not have an opportunity to save its work

- 2 -

prior to the termination of the application. Such premature termination of applications are caused by the life-cycle of these exceptions.

5 **[0005]** In the Microsoft Windows kernel (Win32), an exception handler is provided to handle exceptions occurred in Win32 applications. The exception handler has a process-wide top-level exception filter. The default action of the top-level exception filter is to terminate the application. When an exception occurs, the CPU of the computer suspends the current path of execution, and transfers control to the exception handler. Some exceptions are handled by the exception handler. Any exception that reaches the Win32 top-level exception
10 filter will cause the application to close without saving any data.

15 **[0006]** Traditionally, this situation has been handled by having the application perform periodic saves while the application is running. Although this works well in any situation, including power failures, it still introduces a large "panic-factor" into any exceptional condition. Any changes made between a periodic save and the closing of the application will be lost. Basically, the application still fails even when something as catastrophic as a null pointer exception is encountered. Such a situation is unacceptable to the user.

20

[0007] Application recovery is the art of maintaining an application in an executable state regardless of internal conditions. There are some attempts to programmatically perform application recovery.

25 **[0008]** Microsoft File Recovery uses an on-demand repair which allows applications to repair themselves if they come across any problems during application execution. This program uses a management API of the Windows to programmatically determine the path to specific install package components that are installed on a computer. The primary use of their API is to enable the
30 Windows Installer service to manage all file paths on behalf of the application. At run time, the application can ask the Windows Installer service for a path to a

- 3 -

given component. If a file path problem occurs in an application at run time, the Windows Installer service can repair the problem by recopying the necessary files to the appropriate folder. However, this seems to deal with the file path problems only.

5

[0009] It is therefore desirable to provide a system and method which increases the chances of success of application recovery from runtime problems.

SUMMARY OF THE INVENTION

10

[0010] An operating system has a top level exception handler which terminates an application as a default action upon receipt of any exceptions occurred due to runtime problems of an application. The present invention traps an exception before it reaches the top level exception handler. Thus, premature termination of the application is prevented in a case of a runtime problem. In preferred
15 embodiments, the invention attempts to return the application to the last known good state.

[0011] In accordance with an aspect of the present invention, there is provided a
20 method for recovering an application from a runtime fault. The method comprises steps of receiving an exception caused due to a runtime fault in a thread; dispatching the exception to an exception handler; trapping the exception before the exception reaches the exception handler when the exception handler is a top level exception handler which terminates the application; and continuing
25 execution of the application.

[0012] In accordance with another aspect of the present invention, there is provided a method for recovering an application from a runtime fault in a thread.
30 The application is executed under an operating system having one or more low level exception handlers and a top level exception handler. The method comprises steps of trapping an exception which is dispatched to the top level

- 4 -

exception handler before the exception reaches the top level exception handler, a default action of which is to terminate the application upon receipt of exceptions; and continuing execution of the application.

5 **[0013]** In accordance with another aspect of the present invention, there is provided an application recovery system for recovering an application from a runtime fault caused in a thread. The application runs under an operating system having an exception dispatcher, one or more low level exception handlers and a top level exception handler which terminates the application. The application
10 recovery system comprises an exception trapper and a trapped exception handler. The exception trapper is placed between the exception dispatcher and the top level exception handler, and provided for trapping an exception before the exception reaches the top level exception handler. The trapped exception handler is provided for handling the trapped exception.

15

[0014] Other aspects and features of the present invention will be readily apparent to those skilled in the art from a review of the following detailed description of preferred embodiments in conjunction with the accompanying drawings.

20

BRIEF DESCRIPTION OF THE DRAWINGS

[0015] The invention will be further understood from the following description with reference to the drawings in which:

25 Figure 1 is a block diagram showing an example of an existing exception handler;

Figure 2 is a flowchart showing the operation of the exception handler shown in Figure 1;

Figure 3 is a block diagram showing an application recovery system in accordance with an embodiment of the present invention;

30 Figure 4 is a flowchart showing the operation of the application recovery system shown in Figure 3;

- 5 -

Figure 5 is a block diagram showing an example of a trapped exception handler shown in Figure 3;

Figure 6 is a flowchart showing the operation of the trapped exception handler shown in Figure 5;

5 Figure 7 is a block diagram showing an application recovery system in accordance with another embodiment of the present invention; and

Figure 8 is a flowchart showing the operation of the application recovery system shown in Figure 7.

10 DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0016] Prior to describing embodiments of the present invention, a typical existing OS exception handler of an Operating System (OS) is described referring to Figures 1 and 2. The OS exception handler 2 has an exception dispatcher 4, a
15 top level exception handler 6 and one or more lower level exception handlers 6.

[0017] During execution of an application, the executor of the operating system creates a primary thread to execute the code of the application. The application, during its execution cycle, may create any number of threads. As shown in
20 Figure 2, when the computer hardware detects a fault in a thread, the exception dispatcher 4 receives an exception from the computer hardware (10). The exception dispatcher 4 determines if there exists a low level exception handler 8 that matches the exception, i.e., that is capable of resolving the exception (12). It may use a look up table to select a matching lower level exception handler 8. If a
25 matching lower level exception handler 8 exists, the exception dispatcher 4 dispatches the exception to the matching low level exception handler (14). The matching low level exception handler 8 resolves the exception, and the executor of the operating system continues execution of the application (16).

30 **[0018]** If there is no low level exception handler that matches the exception (12), the exception dispatcher 4 dispatches the exception to the top level exception handler 6 (18). The top level exception handler 6 then terminates the application

- 6 -

as a default action (20). Thus, the application is terminated without executing any other code.

5 [0019] Now, referring to Figures 3 and 4, an application recovery system 30 in accordance with an embodiment of the present invention is described. In Figures 3 and 4, similar elements or steps to those in Figures 1 and 2 are indicated with the same reference numerals.

10 [0020] The application recovery system 30 comprises an exception trapper 32 and a trapped exception handler 34. The exception trapper 32 is placed between the exception dispatcher 4 and the top level exception handler 6 of the OS exception handler 2 so that exceptions dispatched to the top level exception handler 6 can be trapped by the exception trapper 32 prior to reaching the top level exception handler 6. The exception trapper 32 may be provided in place of
15 the top level exception handler 6.

[0021] As shown in Figure 4, when there is no lower level exception handler that matches the exception (12), the exception trapper 4 traps the exception before it reaches the top level exception handler 6 (40). The exception trapper 32
20 dispatches the trapped exception to a trapped exception handler 34 (42). If the trapped exception handler 34 is capable of resolving the trapped exception (44), it resolves the trapped exception and continues the execution of the application (46). If the trapped exception handler 34 is not capable of resolving the trapped exception (44), it terminates the thread that caused the exception, and continues
25 the execution of the application (46).

[0022] Thus, the application will not be terminated by the top level exception handler 6. Even if the exception cannot be resolved, the application recovery system 30 allows the execution of some code of the application before the
30 application is terminated. Thus, an exceptional condition need not result in the termination of the application. For example, when a worker thread fails and executes without a message queue, only the worker thread needs to be

- 7 -

terminated and the application may be restored to the state that it was in before the thread failed.

5 **[0023]** As shown in Figure 5, the trapped exception handler 34 may include an exception translator 50, an exception handler selector 52, a thread terminator 54 and a state restorer 56.

10 **[0024]** As shown in Figure 6, the exception translator 50 passes the exception to be resolved by one of low level exception handlers 8 in the exception handler 2 of the operating system (70). The exception handler selector 52 selects a low level exception handler 8 that matches the translated exception (72). If there is such a matching low level exception handler 8 (74), then it dispatches the translated exception to the matching low level exception handler 8 (76). The translated exception is resolved and the execution of the application continues (78).

15 **[0025]** If there is no matching low level exception handler 8 (74), then the thread terminator 54 terminates the thread that caused the exception (80). The state restorer 56 restores the state that the application was in before the thread failure, and the execution of the application is continued (82).

20 **[0026]** Figure 7 shows an application recovery system 90 in accordance with another embodiment of the invention. The recovery system 90 has an exception trapper 32 and a trapped exception handler 34, as in the recovery system 30 shown in Figure 3. In addition, the recovery system 90 has a state information
25 logger 92, a comparator 94, an user advisor 96 and a query generator 98.

[0027] An example of the operation of the recovery system 90 is described referring to Figure 8.

30 **[0028]** The recovery system 90 is started when the application starts up. When the recovery system 90 receives an exception (100), the state information logger 92 logs the state information that the application was in before the thread failure

- 8 -

occurred (102). The state information may include the information of the application and computer just before the thread failure.

5 **[0029]** If the exception may be resolved locally (104), the exception is resolved as described above referring to Figures 4 and 6 (106), and the execution of the application is continued (108).

10 **[0030]** If the exception cannot be resolved locally (104), the comparator 94 compares the state information with a local database to search for a solution (110). If the exception is a known issue in the local database (112), the comparator 94 retrieves solution information found in the local database, and the user advisor 96 informs the user of the solution information (114). The solution information may include information of the problem caused the exception and recommendation for resolving the problem. Then, the execution of the application
15 is continued (116).

20 **[0031]** If the exception is not a known issue in the local database (112), the recovery system 90 may query a remote database (118). The remote database may be provided in a computer of a manufacturer or merchant of the application. When it is to query a remote database (118), the query generator 98 generates a query with the state information to the remote database (120). If the problem is a known issue at the remote database (122), solution recommendation is returned to the recovery system 90 and the user advisor 96 informs the user of the solution recommendation (124). If it is not a known issue (122), the query generator 98
25 may send a bug report to a bug report centre (126). The bug report centre may be provided in a manufacture computer, and the bug report may be used for further debugging process. In either case, the execution of the application is continued (116).

30 **[0032]** Thus, the application recovery system 90 may store information about the state that the application was in just before it failed. This information allows initiation of a bug report using accurate information.

- 9 -

[0033] The recovery system 90 and the remote database and the bug report centre may be connected through one or more computer networks, such as the Internet.

5

[0034] Another embodiment of the present invention using a Win32 function is described.

[0035] Under the Win32 Exception Handling, when an exception occurs, the CPU suspends the current path of execution in preparation for transferring control to the exception handler. The CPU saves the current executing state by pushing its flags register (EFLAGS), the code segment register (CS), and the instruction pointer (EIP) onto a stack. Next, the exception code is used to look up and transfer control to the address where the designated handler for this exception resides. at the most fundamental level, the exception code is merely an index into CPU's Interrupt Descriptor Table (IDT), which indicates where the exception should be handled. The IDT is a fundamental data structure comprising an array of interrupt descriptors. It is under the control of the operating system.

[0036] The action of certain exception handlers, such as access violations and stack overflows, in Win32 is to create a structure in the faulting thread's memory that contains information about the fault which was pushed onto the stack, and then to push pointers to this structure onto the thread's stack. The operating system then looks at the user-process and determines if the process has exception handling enabled. If it does, it passes this information off to the exception handler and assumes that the exception has been handled.

[0037] When an exception occurs in user-mode code, the system first checks to see if the process is being debugged or not. If it is, it passes the exception off to the debugger as a "first-chance exception". If the process is not being debugged, or if the associated debugger does not handle the exception, the system next attempts to locate a frame-based exception handler by searching the stack

- 10 -

frames of the thread in which the exception occurred. The system searches the current stack frame first, then searches through preceding stack frames in reverse order. If no frame-based handler can be found, or no frame-based handler handles the exception, but the process is being debugged, the system notifies the debugger a second time. This is known as a "second-chance exception" and usually results in the debuggers handling the exception. Finally, if the process is not being debugged, or if the associated debugger does not handle the exception, the system provides default handling based on the exception type. For most exceptions, the default action is to call the `ExitProcess` function which results in the dreaded application termination.

[0038] Win32 provides a function, `SetUnhandledExceptionFilter`, that allows replacement of the standard top-level exception handler with a different handler. The present embodiment of the invention uses this function to provide a replacement handler that replaces for the standard top-level exception handler. The replacement handler terminate the thread if it is a worker thread and log the error. It does not terminate the application. If a stable state is determined to put the application into, then the replacement handler returns the application to the stable state without causing the application to exit.

[0039] After calling the `SetUnhandledExceptionFilter` function, if an exception occurs in a process that is not being debugged, and the exception makes it to the Win32 unhandled exception filter, the `SetUnhandledExceptionFilter` calls an exception filter function specified by the *`lpTopLevelExceptionFilter`* parameter. For example, the exception filter function may be specified as follows:

```
LPTOP_LEVEL_EXCEPTION_FILTER SetUnhandledExceptionFilter(  
PTOP_LEVEL_EXCEPTION_FILTER lpTopLevelExceptionFilter  
// exception filter function  
);
```

- 11 -

[0040] The parameter *lpTopLevelExceptionFilter* is a pointer to a top-level exception filter function that will be called whenever the `UnhandledExceptionFilter` function gets control, and the process is not being debugged. A value of `NULL` for this parameter specifies default handling within `UnhandledExceptionFilter`, which results in the termination of the application. Accordingly, by setting the parameter to a value other than `NULL`, the termination of the application is prevented.

[0041] The filter function has syntax congruent to that of `UnhandledExceptionFilter`. It takes a single parameter of type `LPEXCEPTION_POINTERS`, and returns a value of type `LONG`. The filter function returns one of the values: `EXCEPTION_EXECUTE_HANDLER`, `EXCEPTION_CONTINUE_EXECUTION`, and `EXCEPTION_CONTINUE_SEARCH`.

[0042] `EXCEPTION_EXECUTE_HANDLER` is a value returned from `UnhandledExceptionFilter` and executes the associated exception handler. This value usually results in the process termination.

`EXCEPTION_CONTINUE_EXECUTION` is a value returned from `UnhandledExceptionFilter` and continues the execution from the point of the exception. The filter function is free to modify the continuation by modifying the exception information supplied to its `LPEXCEPTION_POINTERS` parameter.

`EXCEPTION_CONTINUE_SEARCH` proceeds with normal execution of `UnhandledExceptionFilter`. That means obeying the `SetErrorMode` flags, or invoking the application pop-up message box.

[0043] The `SetUnhandledExceptionFilter` function returns the address of the previous exception filter established with the function. A `NULL` return value means that there is no current top-level exception handler.

[0044] Issuing `SetUnhandledExceptionFilter` replaces the existing top-level exception filter for all existing and future threads in the calling process.

- 12 -

[0045] The present invention is further described below by examples of application recovery systems for recovering Microsoft Foundation Classes (MFC) applications from runtime problems.

5

[0046] MFC installs various exception handlers at different spots throughout the code. The reason that access violations and stack overflows result in the termination of an application is that they are not handled by any other default exception handlers included in MFC code except for the

10 **UnhandledExceptionFilter** function installed as the top-level exception handler for the process. The default action of the **UnhandledExceptionFilter** function is to terminate the application. This is what results in an Illegal Page Fault (IPF) terminating an application.

15 **[0047]** In this example an application recovery system is provided as a structured exception handling (SEH) block. The structured exception handling is used to recover a crashed application from IPFs and other runtime problems.

20 **[0048]** The SEH block is provided around the **PumpMessage()** call in the applications' **CWinApp** override. In case of an exception caused by an IPF, the SEH block provides a logging mechanism of getting the current state of registers, i.e., state information of the application and computer. The logging mechanism also retrieves currently loaded modules, their version numbers and other useful memory references, which can be used as a unique signature into the IPF.

25

[0049] The SEH block traps the exception on the message pump level. At this level, most of the IPFs can be recoverable. Thus, IPFs will usually just result in unwinding from the current message processing. This will give an opportunity for the users to save their work.

30

[0050] The SEH block overrides **CwinApp::ProcessWndProException** with a callback that allows the application to determine if any special conditions need to

- 13 -

be met before terminating a message. Thus, even if an exception cannot be resolved, the SEH block can prevent termination of the application until other condition is met.

5 **[0051]** Alternatively, the SEH block may install a top-level exception handler with a callback that will allow the application to determine what it should do instead of terminating. This may be done by using the SetUnhandledExceptionFilter Win32 function.

10 **[0052]** Further, the SEH block may retrieve an appropriate remedial procedure from the Internet for the given problem and make appropriate suggestions to the user.

15 **[0053]** The logged state information can be sent to a Web server of the manufacturer of the application for a lookup into a database maintained by the Tech Support of the manufacturer. Thus, the SEH block it may retrieve a remedial procedure if any, and it may display the remedial procedure on the user system. It may also suggest a service patch download or incompatible DLLs/drivers.

20 **[0054]** Another example provides an application recovery system as a crash recovery manager (CRM). Before a message queue is created for an application and the application message pump engaged, any terminal exceptions do not usually have a stable state to fall back to. The CRM logs the exception before
25 terminating either the thread in the case of a worker thread gone awry, or the application. To set a pre-queue handler, the CRM uses the process wide unhandled exception filter function:

30 LPTOP_LEVEL_EXCEPTION_FILTER SetUnhandledExceptionFilter
(LPTOP_LEVEL_EXCEPTION_FILTER lpTopLevelExceptionHandler // exception filter function);

- 14 -

[0055] The function that is passed as the `lpTopLevelExceptionFilter` is CRM-specific and resides at an exception level just below the application when installed. All of its logging functions are enclosed within a try-catch block of C++ Exception Handling that will ensure that no exception gets passed to a top level
5 exception handler, the Win32 global `UnhandledExceptionFilter` function which terminates the application as a default action upon receipt of any exception.

[0056] The CRM installs a second exception handler after the message queue has been created for the application and the main message pump is in operation.
10 The second exception handler is as follows:

```
virtual LRESULT ProcessWndProcException( CException *e, const MSG *pMsg);
```

[0057] In this situation, the CRM overrides the default Microsoft Foundation
15 Classes (MFC) message handler that simply unwinds a thread stack and eats the message with one that calls an application defined callback that supplies application -specific handling before unwinding the thread stack and eating the message. It is further preferable to specify to the application what happened to the message and/or change conditions to let it re-execute the instruction and
20 continue at the next line of code of the application. If the system uses a different framework, rather than MFC code, the CRM may enclose the `WindowsProc` pump code in a try-catch block similar to the one found in `AfxWindowsProc` which calls this function.

25 **[0058]** Each of the exception handlers relies upon two situations: the application logging and the application Structured Exception translator. The structured Exception translator is provided as the exception filter
(`CWinThread::ProcessWndProcException`) does not, by default handle exceptions such as access violations which are structured in the old C-style. Such
30 exceptions are called Structured Exceptions in Win32 parlance and need to be translated into C++ style MFC exceptions before the application can handle them. Normally, without the CRM, since the application does not know what to do with

- 15 -

these exceptions, they do not get handled by default, and get populated to the IpTopLevelExceptionFilter which result in termination of the application. To remedy this, the CRM employs a thread -specific MSC Runtime function called:

5 _se_translator_function_set_se_translator(_se_translator_function
se_trans_func);

- 10 **[0059]** This function translates the C-style exception into a C++ structured exception. The CRM then goes one step further by throwing this new exception as a class derived from CException which is the MFC implementation of C++ styled exceptions. Because of the nature of this function and where it gets installed, namely in the memory allocated to a thread, the CRM includes initialization routine for every thread.
- 15 **[0060]** Logging of the state information is accomplished by extracting information based on the address of the function to determine in which module the exception occurred. The CRM uses a number of Win32 global functions to determine various system information including the platform and operating system as well as functions included in other DLLs for DLL versions and DLLs loaded in process.
- 20 The CRM has a DLL recovery module that loads required DLLs explicitly when they are needed. Because the application logging is enclosed in a try-catch block, any problems encountered will simply terminate the logging feature without disabling the recovery feature.
- 25 **[0061]** The CRM may be provided with a callback function for the actions upon encountering an error. Such a provision causes the CRM to be flexible. Also, the application may provide a mechanism by which the error information can be automatically transmitted to a computer of the manufacturer. Because the application version and the exception address provide a unique signature for any
- 30 particular crash, the CRM enables pro-active retrieval of updates and bug-fixes from the manufacture computer automatically so that the application may fix itself.
-

- 16 -

[0062] The application recovery system of the present invention may be implemented by any hardware, software or a combination of hardware and software having the above described functions. The software code, either in its entirety or a part thereof, may be stored in a computer readable memory.

- 5 Further, a computer data signal representing the software code which may be embedded in a carrier wave may be transmitted via a communication network. Such a computer readable memory and a computer data signal are also within the scope of the present invention, as well as the hardware, software and the combination thereof.

10

[0063] While particular embodiments of the present invention have been shown and described, changes and modifications may be made to such embodiments without departing from the true scope of the invention. For example, the elements of the application recovery system are described separately in the

15 above embodiments. However, two or more elements may be combined in a single element. Also, one or more elements may be shared with a different computer in the computer.

- 17 -

What is claimed is:

1. A method for recovering an application from a runtime fault, the method comprising steps of:
 - receiving an exception caused due to a runtime fault in a thread;
 - dispatching the exception to an exception handler;
 - trapping the exception before the exception reaches the exception handler when the exception handler is a top level exception handler which terminates the application; and
 - continuing execution of the application.
 2. The method recited in claim 1 further comprising a step of terminating the thread that caused the exception.
 3. The method recited in claim 1, wherein the dispatching step comprises steps of:
 - determining a corresponding exception handler to which the exception is to be dispatched;
 - dispatching the exception to the corresponding exception handler when the corresponding exception handler exists; and
 - dispatching the exception to a top level dispatcher is the corresponding exception handler when no corresponding exception handler exists.
 4. The method recited in claim 1 further comprising a step of despatching the trapped exception to a trapped exception handler.
 5. The method recited in claim 4 further comprising a step of terminating the thread when the trapped exception handler is not capable of resolving the trapped exception.
 6. The method recited in claim 5, wherein the continuing step allows continuing execution of the application after the thread is terminated.
-

- 18 -

7. The method recited in claim 1 further comprising steps of:
translating the trapped exception into an exception which is able to be resolved by a lower level exception handler, and
determining if there is a lower level exception handler which is capable of resolving the translated exception.
8. The method recited in claim 7 further comprising a step of terminating the thread that caused the exception when there is no lower level exception which is capable of resolving the translated exception.
9. The method recited in claim 2 further comprising a step of logging state information representing the state that the application was in before occurrence of the exception caused the termination of the thread.
10. The method recited in claim 9 further comprising a step of forwarding the logged information to a remote database over a computer network.
11. The method recited in claim 10 further comprising steps of:
receiving a recommendation from the remote database; and
informing the recommendation to the user.
12. The method recited in claim 9 further comprising a step of forwarding a bug report to a bug report centre over a computer network.
13. A method for recovering an application from a runtime fault in a thread, the application being executed under an operating system having one or more low level exception handlers and a top level exception handler, the method comprising steps of:
trapping an exception which is despatched to the top level exception handler b for the exception reaches the top level exception handler, a default action of which is to terminate the application upon receipt of exceptions; and

- 19 -

continuing execution of the application.

14. The method recited in claim 13 further comprising steps of:
translating the trapped exception into an exception which is able to be resolved by a lower level exception handler, and
determining if there is a lower level exception handler which is capable of resolving the translated exception.
 15. The method recited in claim 14 further comprising a step of terminating the thread that caused the exception when there is no lower level exception which is capable of resolving the translated exception.
 16. The method recited in claim 13 further comprising a step of terminating the thread that caused the exception.
 17. The method recited in claim 16 further comprising a step of logging state information representing the state that the application was in before occurrence of the exception caused the termination of the thread.
 18. The method recited in claim 17 further comprising a step of forwarding the logged information to a remote database over a computer network.
 19. The method recited in claim 18 further comprising steps of:
receiving a recommendation from the remote database; and
informing the recommendation to the user.
 20. The method recited in claim 17 further comprising a step of forwarding a bug report to a bug report centre over a computer network.
 21. An application recovery system for recovering an application from a runtime fault, the application recovery system comprising:
an exception dispatcher for receiving an exception caused due to a runtime fault in a thread and dispatching the exception to an exception handler;
-

- 20 -

an exception trapper for trapping the exception before the exception causes termination of the application; and
an executor for continuing execution of the application.

22. The application recovery system as claimed in claim 21, wherein the exception trapper has a thread terminator for terminating the thread that caused the exception.

23. The application recover system as claimed in claim 21, wherein the exception trapper is provided in place of a top level exception handler which terminates the application.

24. An application recovery system for recovering an application from a runtime fault caused in a thread, the application running under an operating system having an exception dispatcher, one or more low level exception handlers and a top level exception handler which terminates the application, the application recovery system comprising:

an exception trapper placed between the exception dispatcher and the top level exception handler for trapping an exception before the exception reaches the top level exception handler; and

a trapped exception handler for handling the trapped exception.

25. The application recovery system recited in claim 24, wherein the trapped exception handler comprises a thread terminator for terminating the thread when there is no lower level exception handler that is capable of handling the translated exception.

26. The application recovery system recited in claim 24, wherein the trapped exception handler comprises:

an exception translator for translating the trapped exception to a translated exception; and

- 21 -

an exception handler selector for determining if a lower level exception handler is capable of resolving the translated exception.

27. The application recovery system recited in claim 26, wherein the trapped exception handler further comprises a thread terminator for terminating the thread when there is no lower level exception handler that is capable of handling the translated exception.

28. The application recovery system recited in claim 27, wherein the trapped exception handler further comprises a state restorer for restoring the state that the application was in before the fault occurred to continue the execution of the application.

29. The application recovery system recited in claim 24 further comprising a state information logger for logging information of the state that the application was in before the fault occurred.

30. The application recovery system recited in claim 29 further comprising a query generator for generating a query including the state information to query a recommendation from a remote database over a computer network.

31. The application recovery system as claimed in claim 30 further comprising a user advisor for receiving a recommendation from the remote database and informing the user of the recommendation.

32. The application recovery system as claimed in claim 30 wherein the query generator has a bug report generator for forwarding a bug report with the state information to a bug report centre.

33. A computer readable memory element storing the instructions or statements for use in the execution in a computer of a method for recovering an application from a runtime fault, the method comprising steps of:

- 22 -

receiving an exception caused due to a runtime fault in a thread;
dispatching the exception to an exception handler;
trapping the exception before the exception reaches the exception handler
when the exception handler is a top level exception handler which terminates the
application; and
continuing execution of the application.

34. Electronic signals for use in the execution in a computer of a method for
recovering an application from a runtime fault, the method comprising steps of:
receiving an exception caused due to a runtime fault in a thread;
dispatching the exception to an exception handler;
trapping the exception before the exception reaches the exception handler
when the exception handler is a top level exception handler which terminates the
application; and
continuing execution of the application.

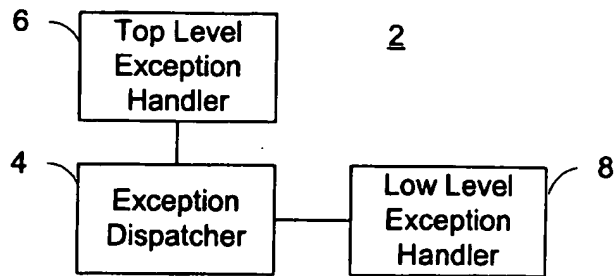


Figure 1
(Prior Art)

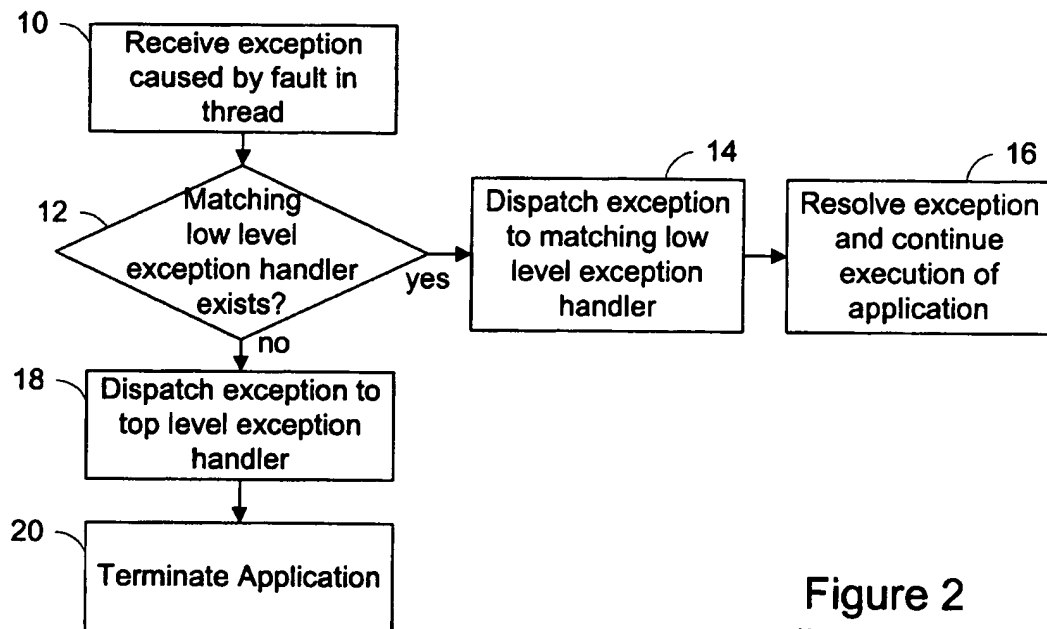


Figure 2
(Prior Art)

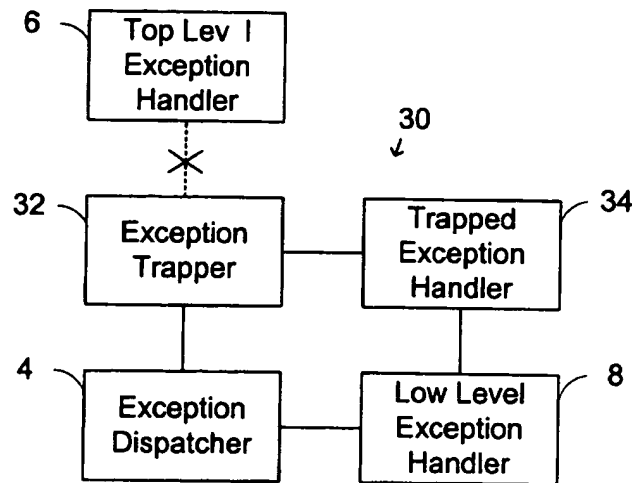


Figure 3

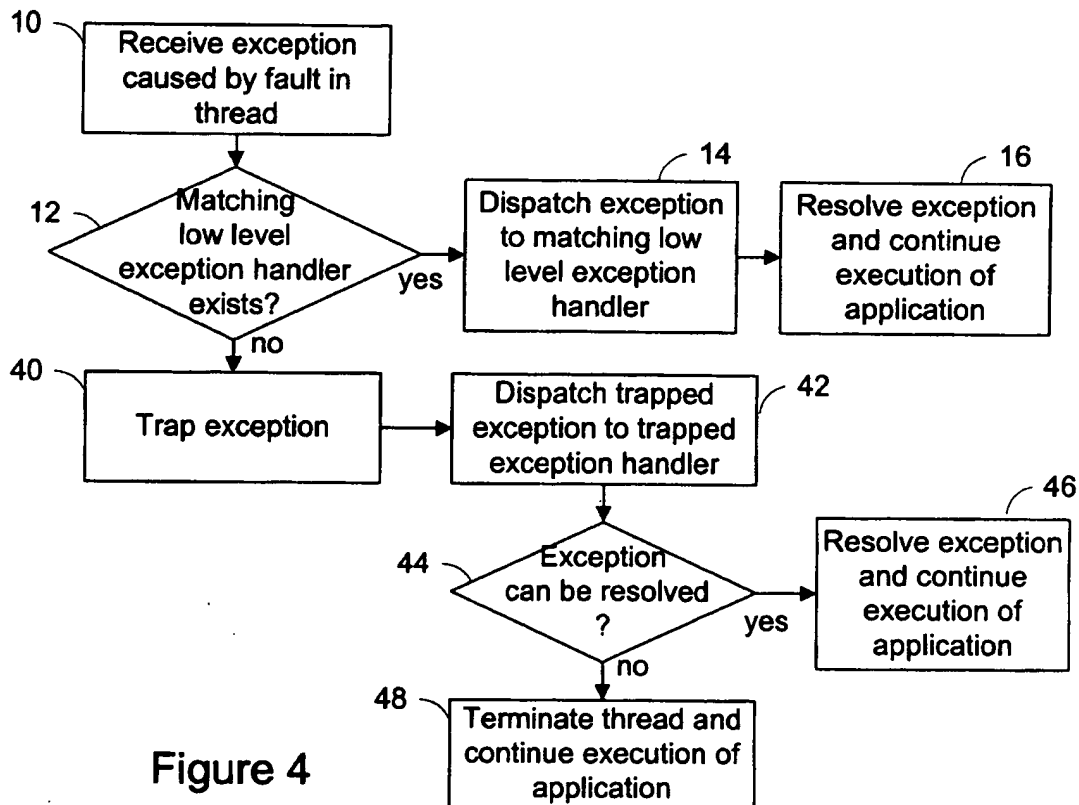


Figure 4

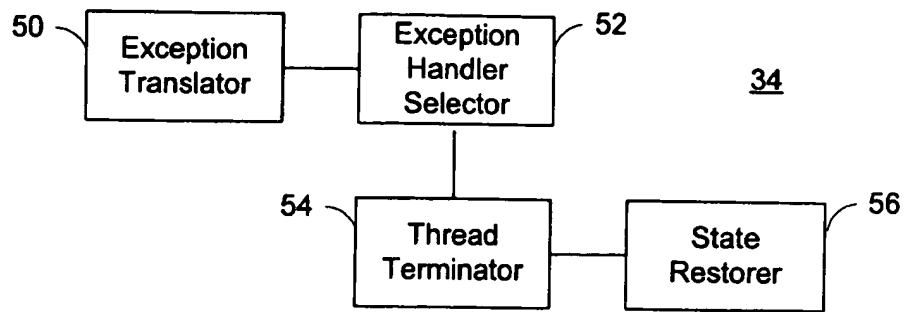


Figure 5

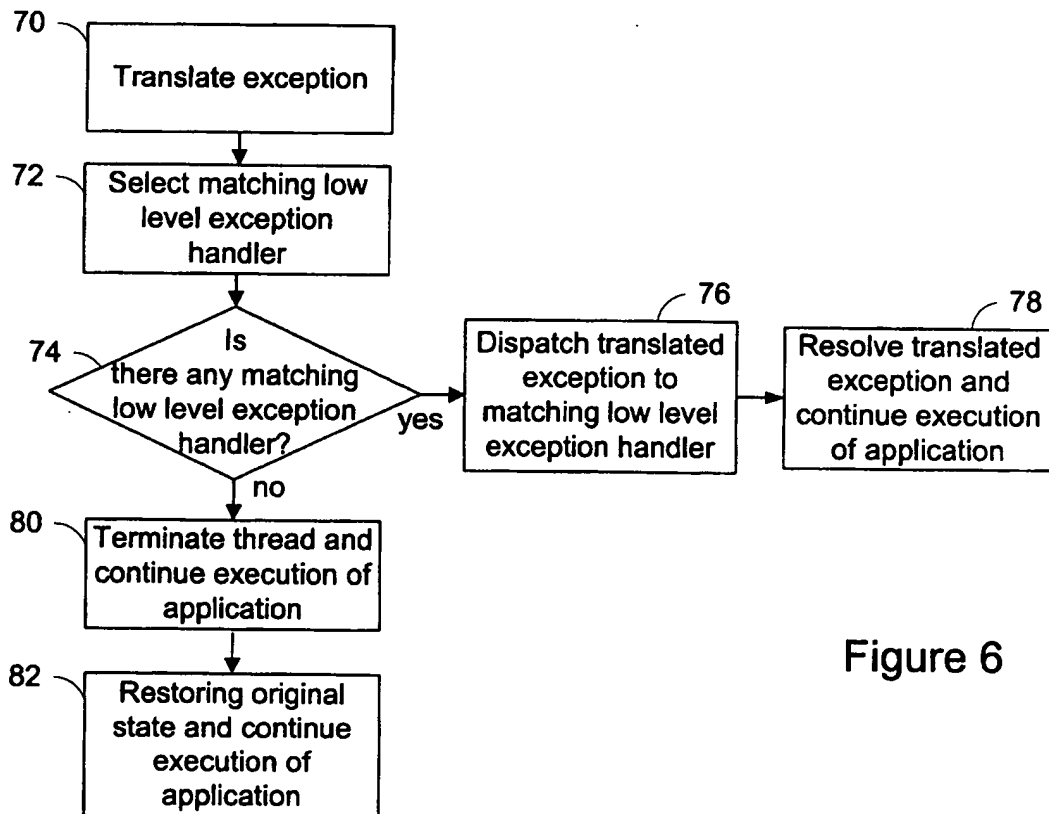


Figure 6

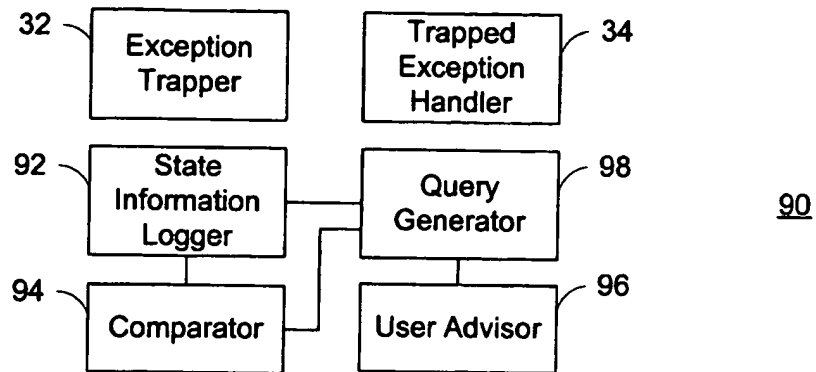


Figure 7

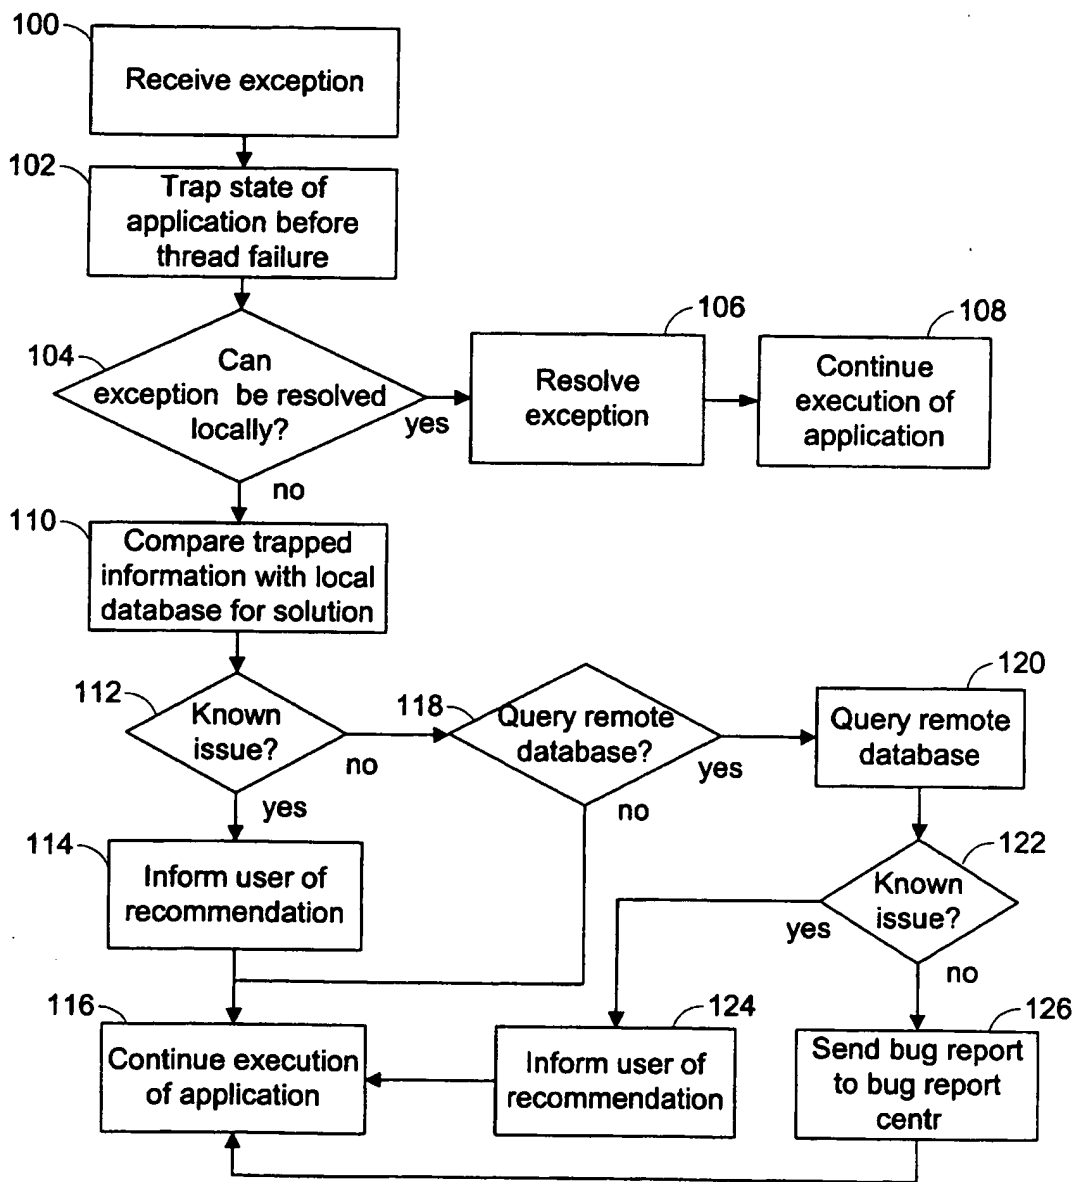


Figure 8